



Finishes You've Never Seen Before®

WESTERN LOCK® STANDING SEAM

Snap Lock Standing Seam Metal Roof Panel

Available Materials: Aluminum, Copper, Corten/A606-4, Steel

Available Finishes: Bare Steel, Galvalume®/Zincalume®, Galvanized, PVDF, SMP Painted

COPPER

METAL ROOFING PANELS

SPECIFICATIONS:

Profile Type:	Standing Seam Metal Panels
Rib Height:	1.75"
Overall Width	
Standard:	18"
Custom Widths Available:	12" - 24" max
Coil Feed:	36", 24", 20"
Warranty:	Sold AS IS – No Warranty
Available Gauges:	16 oz, 20 oz
Substrate:	Copper
Finish:	Copper
Fasteners:	Concealed
Panel Length:	1' to 52' max
Recommended Minimum Roof Slope:	3/12
Installation:	Can be installed over a solid substrate.


ADDITIONAL PRODUCT OPTIONS:

- Striations
- Stiffening Ribs/Beads

APPLIES TO THE FOLLOWING COLORS/FINISHES:


- Copper

***Material does not arrive pre-weathered. Copper panels will develop a natural patina over time with exposure to the elements. Use stainless steel screws for installation. Please refer to Copper dissimilar metals and product handling disclaimer for more information.

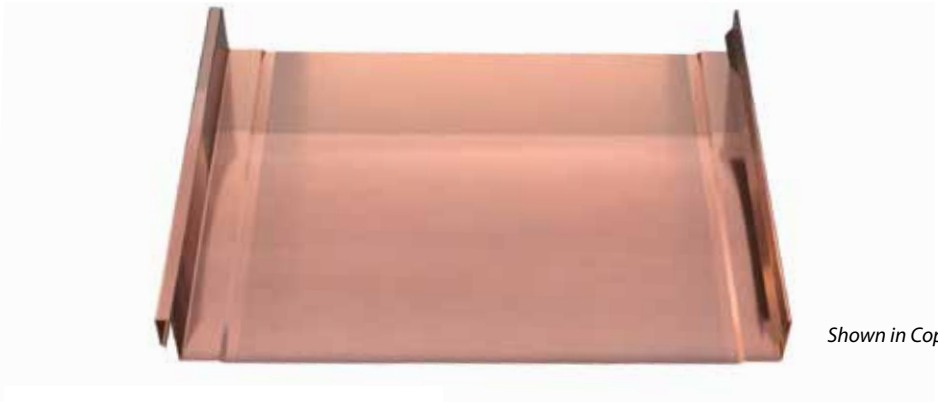

Shown in Copper

PROFILE:

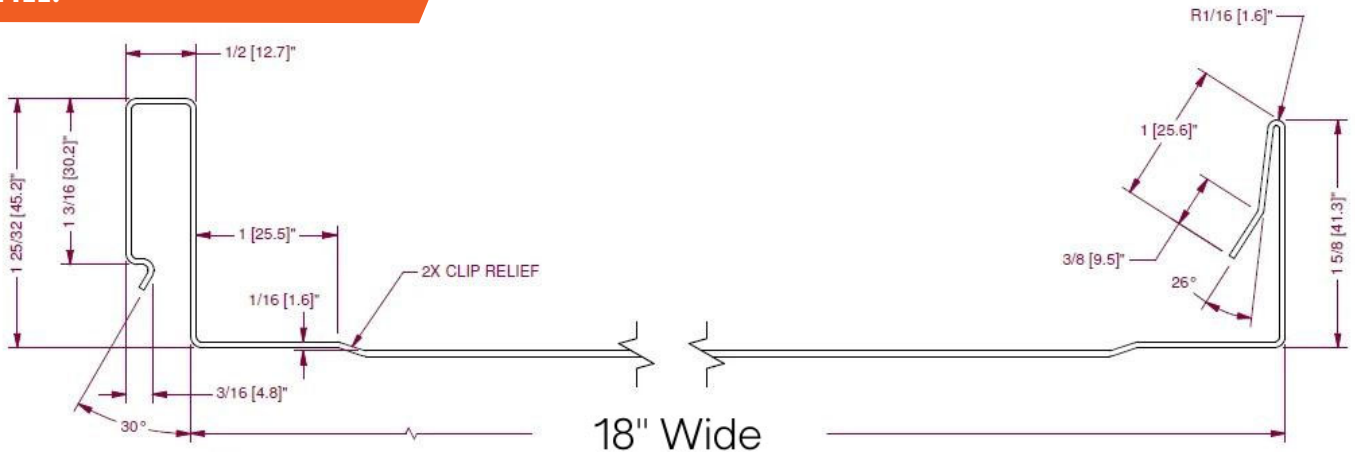

Also available are custom panel widths of: 12", 14", 18", 20", and 24"

Colors represented on this profile sheet may not match actual material. All colors should be verified using an actual metal color sample.

03.27.25

Phoenix: ☎ (602) 495-0048 ✉ sales@westernstatesmetalroofing.com | Washington: ☎ (509) 418-2833 ✉ washington-wsmr@westernstatesmetalroofing.com

Tucson: ☎ (520) 574-4247 ✉ tucsonsales@westernstatesmetalroofing.com | Texas: ☎ (972) 843-4343 ✉ texas-sales@westernstatesmetalroofing.com